



HOSHIZAKI ICE MAKER

IM series Ice production 40kg/day to 240kg/day


IM series Self-contained type



Cube Ice

Air Cooled Model

IM-65LE



Air Flow : Front in /
Right side out • Back side out

IM-65LE-25



IM-100LE



IM-130ME



IM-240M2E




IM series Stack on type




Cube Ice

IM-240AME w/B-300bin




Air Flow : Front in / Top out • Back side out

IM-240DME w/P-200SD2

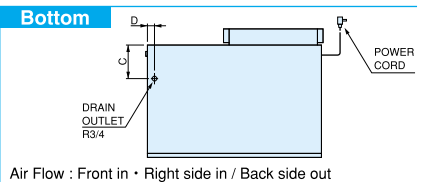

Air Flow : Front in • Right side in / Back side out



	Self-contained type					Stack on type	
	IM-65LE	IM-65LE-25	IM-100LE	IM-130ME	IM-240M2E	IM-240AME	IM-240DME
A (mm)	67	67	72	72	67	48	62.5
B (mm)	74	74	99	99	76	465	81
C (mm)	138	138	207	207	208	40	208
D (mm)	41	41	83	83	57	72	46
E (mm)	—	—	—	—	—	—	—
F (mm)	—	—	—	—	—	—	—
G (mm)	—	—	—	—	—	—	—

IM
Cube Ice
Self-contained type



IM-160ME

Cube size



L (Large)
28×28×32mm



M (Medium)
25×25×23mm

		IM-65LE	IM-65LE-25	IM-100LE	IM-130ME	IM-240M2E
Ice Production(kg/day)	Cube size	L	M	L	L	L
	A.T.21C/ W.T.15C	47	44	83	104	230
	A.T.32C/ W.T.21C	39	37	73	88	210
Bin Capacity (kg)						
		26	26	50	50	110
Cooling System						
		Air	Air	Air	Air	Air
Refrigerant						
		R134a	R134a	R134a	R404A	R404A
Electrical Supply						
		1/220 -240 50Hz	1/220 -240 50Hz	1/220 -240 50Hz	1/220 -240 50Hz	1/220 -240 50Hz
Electrical Consumption (W/h)						
		400	420	630	700	1330
Water Consumption (M3/day)						
		0.21	0.26	0.22	0.27	0.41
Water Supply Inlet						
		G3/4	G3/4	G3/4	G3/4	G3/4
Drain Outlet						
		R3/4	R3/4	R3/4	R3/4	R3/4
Cooling Water Inlet						
		—	—	—	—	—
Cooling Water Outlet						
		—	—	—	—	—
Dimensions (mm)						
		W633 x D506 x H850	W633 x D506 x H850	W704 x D506 x H1200	W704 x D506 x H1200	W704 x D685 x H1510
Weight (kg) Net/Gross						
		63/69	63/69	80/90	80/90	114/129

IM
Cube Ice
Stack on type



IM-240DME
W/P-200SD2

Cube size



L (Large)
28×28×32mm



ML (Medium Large)
28×28×23mm



S (Small)
21×21×14mm

		IM-240AME	IM-240DME
Ice Production (kg/day)	Cube size	L	L,ML,S
	A.T.21C/ W.T.15C	230	230
	A.T.32C/ W.T.21C	210	210
Bin Capacity (kg)			
		N/A	N/A
Cooling System			
		Air	Air
Refrigerant			
		R404A	R404A
Electrical Supply			
		1/220 -240 50Hz	1/220 -240 50Hz
Electrical Consumption (W/h)			
		1330	1330
Water Consumption (M3/day)			
		0.45	0.45
Water Inlet			
		G3/4	G3/4
Water Outlet			
		R3/4	R3/4
Dimensions (mm)			
		W560 x D800 x H865	W1084 x D800 x H395
Weight (kg) Net/Gross			
		90/95	90/95